

Index: P-2 Corner: CW 1/16 LAND CORNER RECORD
 Twnshp: 7N Range: 1E Section: 19 2nd P.M. County
 EXISTING SURVEYS

State of Indiana
 Hoosier National Forest

Monroe

Original Government Survey

Original Survey Evidence Found

Year Surveyed:				By:			
Original Monument:				Date of Search:			
Species	Diameter	Bearing	Distance	Monument Found:			
				Species	Diameter	Bearing	Distance
Subsequent Corner Restoration				Evidence of Subsequent Corner Restoration Found			
Where Filed or Recorded: Monroe County Surveyor's Office				Year Searched: 8/23/2012 By: D. Norrington			
Book: 1 Page: 271 Date: 05/04/1854				Monument Found: Stone w/ "+" measuring 6" x 8" x 6" above ground			
Monument Set: Stone w/ "+" on top				Species			
Species	Diameter	Bearing	Distance	Species	Diameter	Bearing	Distance
White Oak	13"	S 49° W	41 links				

OTHER EVIDENCE

Describe corner loc. relative to nearby features & dir. to corner location; note fences, roads, etc.	Sketch of Monument
Stone found on a north-northeast facing slope, 90 feet northeast of FS Road 4725.140. Old fence wire remnants were found running south from the stone. From the intersection of Hardin Ridge Road (4725.000) and FS Road 4725.140, travel north then northwest on 4725.140 for approximately 1,300 feet. The stone is located 90 feet northeast from this point in the road. A carsonite Land Survey Marker post was installed 2.0 feet north of the stone. The coordinates shown at the bottom were collected using a resource grade Trimble GEO XT unit. The horizontal precision was 3.8 feet.	

PERPETUATION RECORD

Photographs of vicinity.							
							
Corner Diagram	Accessories: Describe new BTs & witness objects established to perpetuate existing evidence.						
	<table border="0"> <tr> <td>Chestnut Oak 13" Diam. N 62° W 19.4 Feet</td> <td>Black Oak 20" Diam. S 00° W 3.75 Feet (fence remnants)</td> <td>Red Oak 11" Diam. N 20° E 8.0 Feet</td> </tr> <tr> <td>No tags or paint</td> <td>No tags or paint</td> <td>No tags or paint</td> </tr> </table>	Chestnut Oak 13" Diam. N 62° W 19.4 Feet	Black Oak 20" Diam. S 00° W 3.75 Feet (fence remnants)	Red Oak 11" Diam. N 20° E 8.0 Feet	No tags or paint	No tags or paint	No tags or paint
	Chestnut Oak 13" Diam. N 62° W 19.4 Feet	Black Oak 20" Diam. S 00° W 3.75 Feet (fence remnants)	Red Oak 11" Diam. N 20° E 8.0 Feet				
	No tags or paint	No tags or paint	No tags or paint				
	Corner Recordation:	Certificate Prepared:					
	Filed and Recorded in County records:	Date:					
Book:	Page:						
IN State Plane Coordinates:	N. 1376836.95 E. 3130791.68						
Edited By: Darren Norrington	Date Created: 08/24/2012						
Section: 19							

Referenced on ASA survey recorded as InstNo.2011000606.

Accepted by the Monroe County Surveyor Review Board on August 6, 2019.

MONUMENT RECORD

CORNER I.D.

B - 15



STATE OF INDIANA - COUNTY OF MONROE

SECTION 19, TOWNSHIP 7 NORTH, RANGE 1 EAST

MONUMENT DESCRIPTION & REMARKS

FOUND SANDSTONE STONE WITH CHISELED "X" ON TOP, STONE IS SOLID
IN THE GROUND, STONE IS 0.50' WIDE BY 0.40' LONG BY 0.40' OUT
OF THE GROUND.

RECOVERY TIE DRAWING

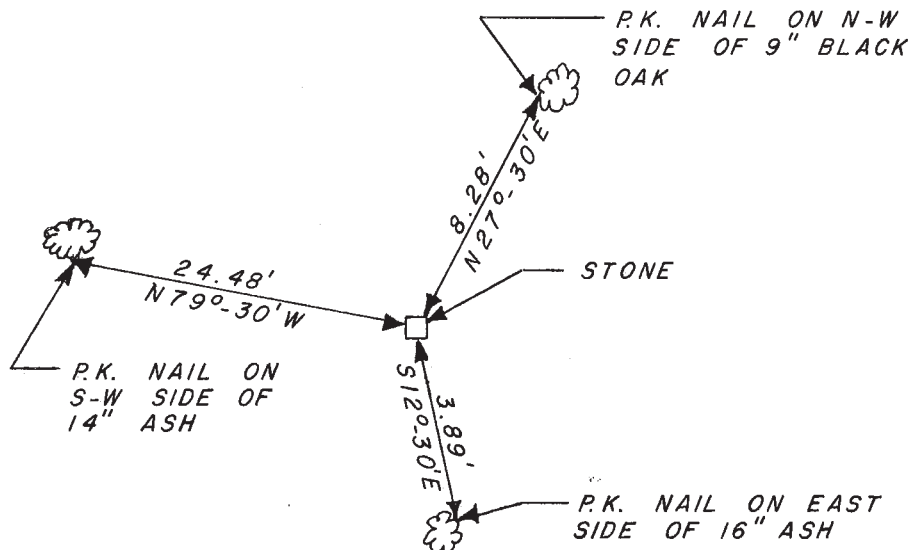

(●) AT CORNER



NOT TO SCALE

STATE OF INDIANA

COUNTY OF MONROE

I, EDMUND O. FARKAS HEREBY CERTIFY THAT THIS
DOCUMENT WAS PREPARED UNDER MY DIRECTION IN ACCORDANCE
WITH THE PROVISIONS OF SECTION 17-3-64-4 - 17-3-64-8 OF
THE INDIANA CODE, BEING ACTS OF 1965, CHAPTER 319; AND
THE ABOVE DATA IS GIVEN UNDER MY HAND AND SEAL
THIS 18 TH DAY OF MAY, 1984 A.D.

SPACE
RESERVED
FOR
RECORDING
OFFICER.

INDIANA REGISTERED LAND SURVEYOR NO. _____

OR _____

UNITED STATES GOVERNMENT AGENCY

TOWNSHIP:
POLK

CORNER I.D.

TITLE _____

B - 15